

N-type TOPCon

ASP635T-66BDG

610-635W

Rectangle Bifacial Module with
Double Glass

23.50%
Max. Efficiency



N-Type 182*210mm Cell

Adopting the 182*210mm N-Type TOPCon cells with the highest efficiency.



Bifacial with Double-Glass

Module adopts 182*210mm half cells, bifacial module provide an additional 5%~25% output.



Load Capacity

Mechanical load tests including wind load 2400Pa and snow load 5400Pa done by TUV.



PID Protection


Ensure the attenuation probability caused by PID phenomenon is minimized.



Harsh Environmental Adaptability

Strict salt spray and ammonia corrosion test by TUV.

Power Warranty

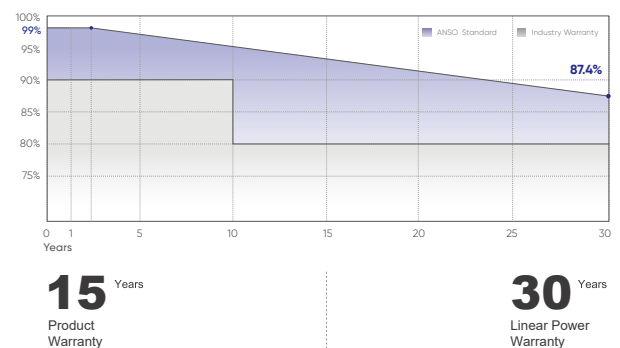

Quality Management System


IEC61215/61730, IEC62804(PID), IEC61701(Salt).
IEC62716 (Ammonia), IEC60068-2-68(Sand).
ISO 9001:2015/quality management system.
ISO 14001:2015/environmental management system.
ISO 45001:2018/occupation health safety management system.
ISO 50001:2011/energy management system.
IEC TS 62941-2016/PV industry quality management system.

ASP610-635W

Mechanical Characteristics

Weight	32.3kg
Dimensions	2382×1134×30mm
Cell Dimensions	182×210mm
Cell Amount	66×2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Glass Thickness	(F) 2.0mm, Anti-Reflection Coating (B) 2.0mm, Heat Strengthened Glass
Frame	Aluminum Alloy
Cable	4mm², 300mm in length, length can be customized / UV resistant
Connector	MC4 Compatible
Bifaciality	80±5%
Packing	36pcs/pallet, 720pcs/40'HQ Container

Drawings

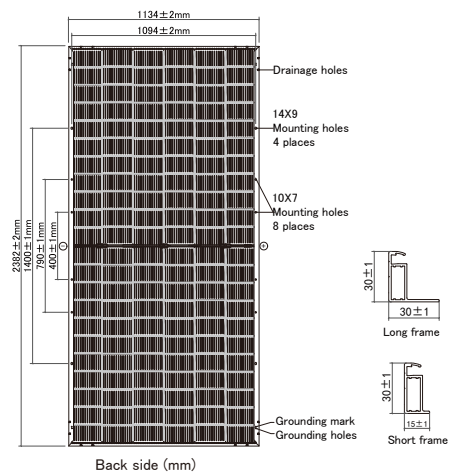

Electrical Parameters(STC*)

Module Type: ASP635T-66BDG	610	615	620	625	630	635
Maximum Power (Pmax/W)	610	615	620	625	630	635
Open Circuit Voltage (Voc/V)	48.69	48.89	49.09	49.29	49.49	49.69
Short Circuit Current (Isc/A)	15.99	16.05	16.11	16.17	16.23	16.29
Voltage at Maximum Power (Vmp/V)	40.45	40.65	40.85	41.05	41.25	41.45
Current at Maximum Power (Imp/A)	15.09	15.15	15.20	15.25	15.30	15.35
Module Efficiency (%)	22.60	22.80	23.00	23.10	23.30	23.50

*STC: Irradiance 1000W/m², cell temperature 25°C, AM=1.5. Tolerance of Pmax is within ±3%.

Electrical Parameters(NMOT*)

Maximum Power (Pmax/W)	465	469	472	476	480	484
Open Circuit Voltage (Voc/V)	46.86	47.05	49.09	49.29	49.49	49.69
Short Circuit Current (Isc/A)	12.89	12.94	12.99	13.03	13.08	13.13
Voltage at Maximum Power (Vmp/V)	37.95	38.14	38.33	38.52	38.70	38.89
Current at Maximum Power (Imp/A)	12.26	12.31	12.35	12.39	12.43	12.47

**NMOT: Under Nominal Module Operating Temperature (NMOT), irradiance of 800W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1m/s.

Electrical Parameters(At 10% Bifacial Power Output)

Output Power (Pmax/W)	674	680	685	691	696	702
Open Circuit Voltage (Voc/V)	48.70	48.90	49.10	49.30	49.50	49.70
Short Circuit Current (Isc/A)	17.59	17.66	17.72	17.79	17.86	17.92
Voltage at Maximum Power (Vmp/V)	40.50	40.70	40.90	41.10	41.30	41.50
Current at Maximum Power (Imp/A)	16.65	16.72	16.77	16.83	16.89	16.94

Temperature Characteristics

NMOT	41±3°C
Temp. Coefficient of Voc	-0.25%/°C
Temp. Coefficient of Isc	+0.046%/°C
Temp. Coefficient of Pmax	-0.30%/°C

Maximum Rating

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400Pa/5400Pa
Fuse Current	30A

Characteristics(ASP635T-66BDG)

