

N-type TOPCon

ASP730T-66BDG

710-730W

Bifacial Module with Double Glass

23.50%
Max. Efficiency



N-Type 210*210mm Cell

Adopting the 210*210mm N-Type TOPCon cells with the highest efficiency.



Bifacial with Double-Glass

Module adopts 210*210mm half cells, bifacial module provide an additional 5%~25% output.



Load Capacity

Mechanical load tests including wind load 2400Pa and snow load 5400Pa done by TUV.



PID Protection


Ensure the attenuation probability caused by PID phenomenon is minimized.



Harsh Environmental Adaptability

Strict salt spray and ammonia corrosion test by TUV.

Power Warranty

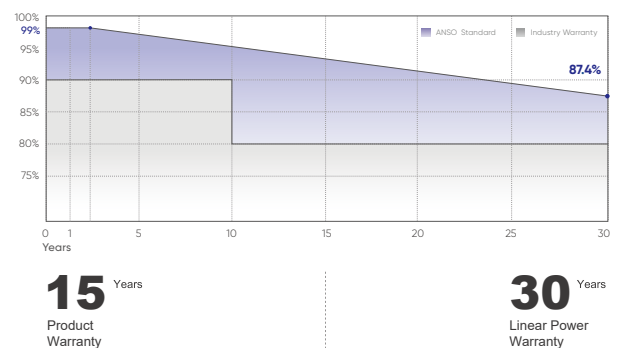

Quality Management System


IEC61215/61730, IEC62804(PID), IEC61701(Salt).
 IEC62716 (Ammonia), IEC60068-2-68(Sand).
 ISO 9001:2015/quality management system.
 ISO 14001:2015/environmental management system.
 ISO 45001:2018/occupation health safety management system.
 ISO 50001:2011/energy management system.
 IEC TS 62941-2016/PV industry quality management system.

ASP710-730W

Mechanical Characteristics

Weight	38 kg
Dimensions	2384×1303×33mm
Cell Dimensions	210×210mm
Cell Amount	66×2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Glass Thickness	(F) 2.0mm, Anti-Reflection Coating (B) 2.0mm, Heat Strengthened Glass
Frame	Aluminum Alloy
Cable	4mm², 300mm in length, length can be customized / UV resistant
Connector	MC4 Compatible
Bifaciality	80±5%
Packing	33pcs/pallet, 594pcs/40'HQ Container

Drawings

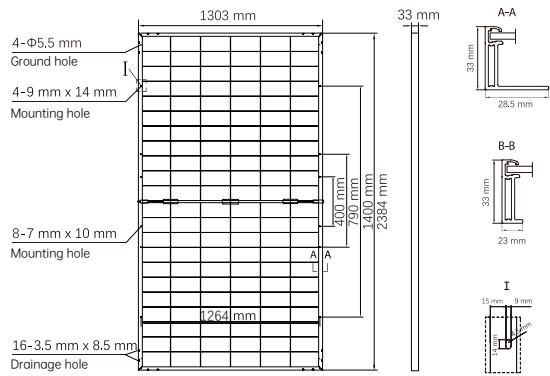

Electrical Parameters(STC*)

Module Type: ASP730T-66BDG	710	715	720	725	730
Maximum Power (Pmax/W)	710	715	720	725	730
Open Circuit Voltage (Voc/V)	48.77	48.97	49.17	49.37	49.57
Short Circuit Current (Isc/A)	18.48	18.53	18.58	18.63	18.68
Voltage at Maximum Power (Vmp/V)	40.48	40.65	40.81	40.98	41.15
Current at Maximum Power (Imp/A)	17.54	17.59	17.64	17.69	17.74
Module Efficiency (%)	22.90	23.00	23.20	23.30	23.50

*STC: Irradiance 1000W/m², cell temperature 25°C, AM=1.5. Tolerance of Pmax is within ±3%.

Electrical Parameters(BNPI*)

Maximum Power (Pmax/W)	781.0	786.5	792	797.5	803.0
Open Circuit Voltage (Voc/V)	48.77	48.97	49.17	49.37	49.57
Short Circuit Current (Isc/A)	20.45	20.50	20.56	20.62	20.68
Voltage at Maximum Power (Vmp/V)	40.48	40.65	40.82	40.98	41.14
Current at Maximum Power (Imp/A)	19.29	19.35	19.40	19.46	19.52

**BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25° C, AM=1.5

Temperature Characteristics

NMOT	41±3°C
Temp. Coefficient of Voc	-0.25%/°C
Temp. Coefficient of Isc	+0.046%/°C
Temp. Coefficient of Pmax	-0.30%/°C

Maximum Rating

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400Pa/5400Pa
Fuse Current	25A

Characteristics(ASP730T-66BDG)

